


Finish Nailer Belt hook Removal




Step 2: Slide the assembly off the keyway

Step 1: Lift lever up to unlock

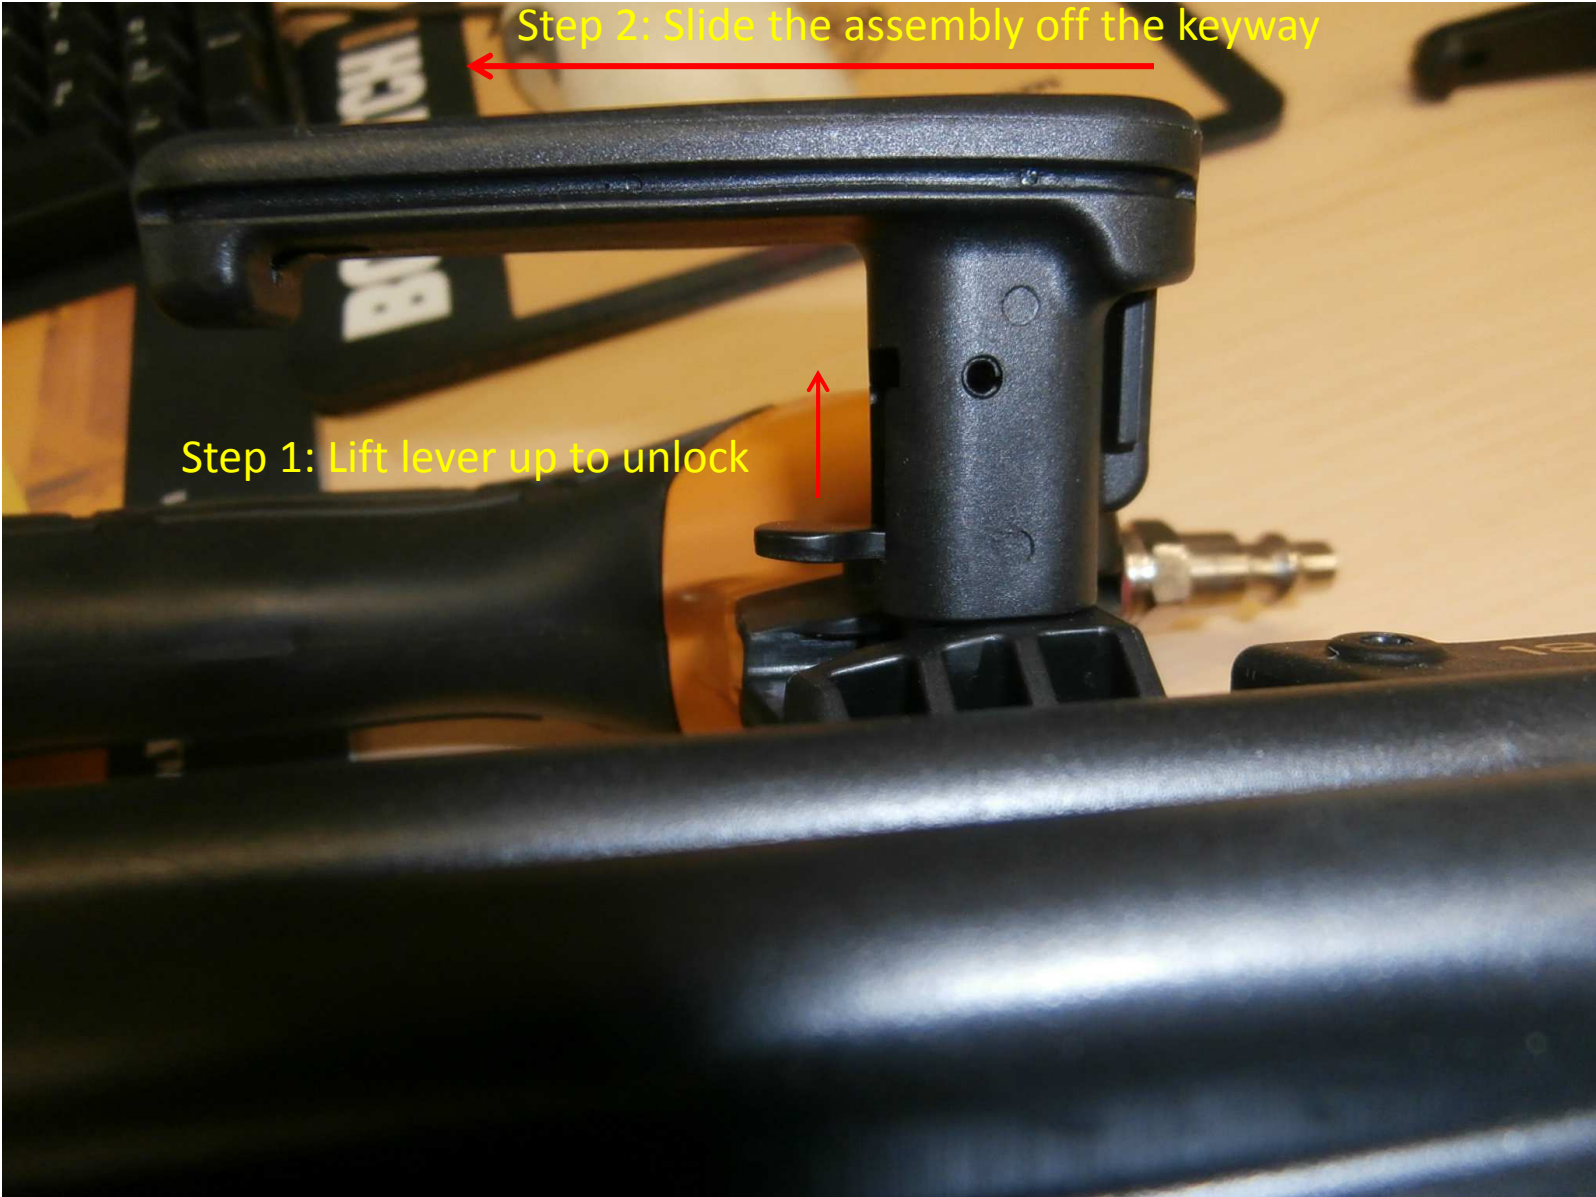

Lever locked, pin exposed

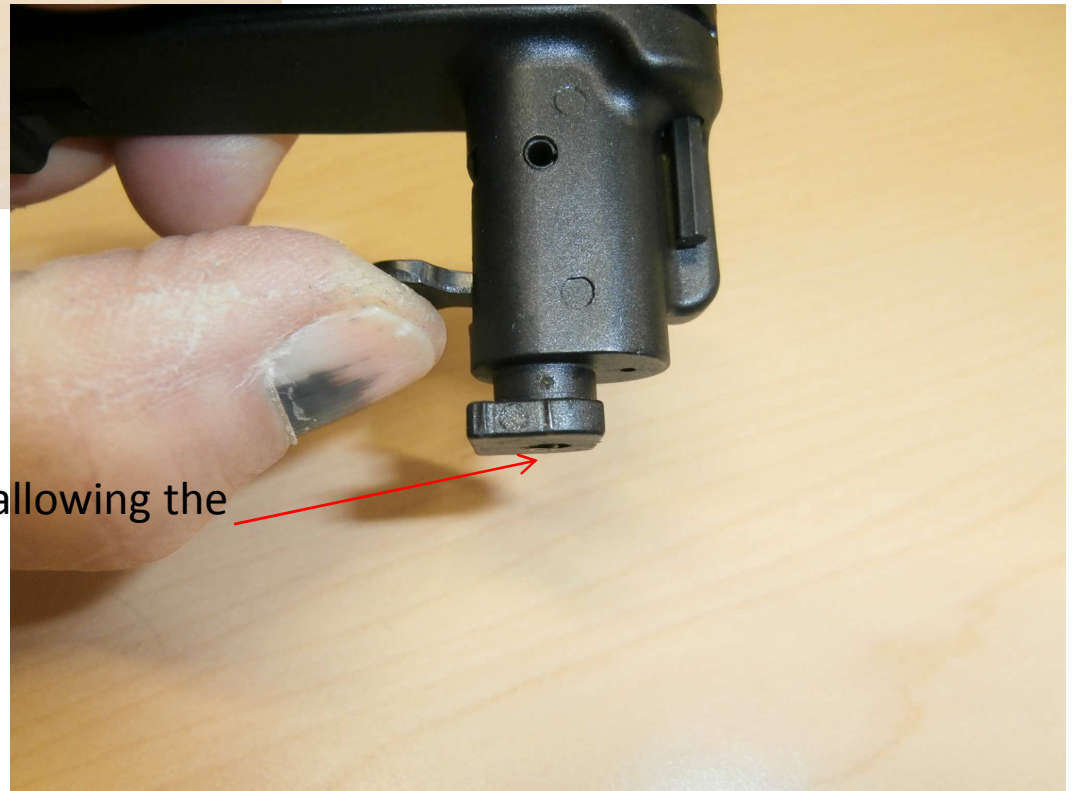

Lever unlocked, the pin is up allowing the assembly to be moved



Mating keyway with hole
for lock pin

Sometimes new parts
can be stiff, but will
break in quickly